


AKH-0.66 W-7 series Current Transformer


1. Product features

The product is round, output is 50mA (small current signal), can be used with AMC16Z series multi channel power meter which are produced by our company, the product has advantages of small size, high precision, carrying capacity, easy installation and etc, it can saving cost in multi channel energy monitoring for customers.

2. Name rule

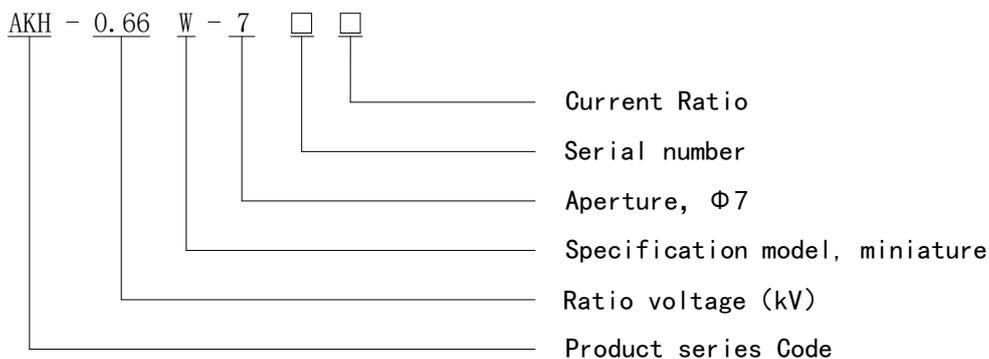

3. Size (Unit: mm, $\pm 1\text{mm}$)

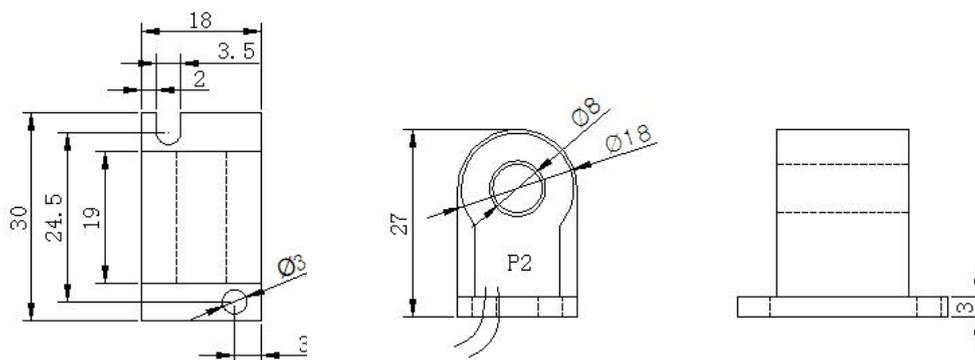

Note: The primary current enters from P1 and exits from P2 (glue filling surface). The red and yellow lead lines are S1 and S2. The length of the lead line is $2\text{m} \pm 10\text{cm}$.

4. Parameter



Type	Ratio (A)	Class&Burden (Ω)			Turns	Dia. (mm)
		0.2	0.5	1.0		
W-7	(5-15) A/5mA	10			1	$\Phi 7$
	(10-30) A/10mA	10			1	
	5A/10mA		10		1	
	5A/20mA		10		2	
	10A/20mA		10		1	
	(20-60) A/20mA	10			1	
	50A/25mA	10			1	
	(5-15) A/5mA	10			1	