

1

H024.1 AHBC-LT1005 High Precision Hall Current Sensor V1.1


1.Product Description

AHBC-LT1005 high-precision Hall current sensor is insulated between the primary and secondary, no position error, can really measurement resolution 1000:1, for precise measurement of DC, AC and pulse current.

The product meets the industry standard: JB/T7490-2007 《Hall Current Sensor》.

2. Technical parameters and dimensions




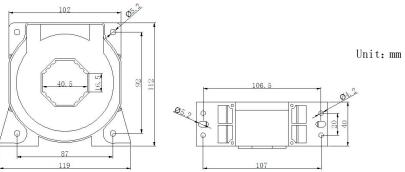




Rated Input Voltage	1000A			
Measure The Voltage Range	1500A			
Measuring Resistance	±15V	@±1000Amax	0(min)	20(max)
		@±1200Amax	0(min)	7.5(max)
Turns Ratio	1:5000			
Rated Output Current	2mA±0.1%FS(10A), 200mA±0.1%FS(1000A)			
Precision	0.5 级			
Voltage	±12V~±24V			
Power Consumption Current	20mA+ls			
Zero Current Offset	±0.2mA			
Response Time	<1µs			
Linearity	≤0.05%FS			
Insulation Voltage	3kV/50Hz/1min			
Bandwidth (-3dB)	0-100KHz			
Secondary Coil Resistance	50 Ω			
Operating Temperature	-40∼85°C			
Storage Temperature	-40∼85°C			

3.Mode of Connection





Auxiliary power Signal output

+15V— power supply+15V

-15V ——power supply-15V (Note that power positive and negative poles cannot be inversely connected.)

M — signal output end positive pole

G — power ground and signal output end negative pole

Note: The specific wiring is subject to the terminal no. of object shell.

4. Precautions

- 1. When the Hall sensor is used, attention must be paid to the coupling between the primary side coil and assistant side coil in order to get better dynamic characteristics and sensitivity, single conductor that should cram the thread hole of Hall sensor module completely is proposed to use.
- 2. When the Hall sensor is used, the best measuring accuracy can be got under rated input current value. When the measured current is much less than the rated value, the primary side can use multi-turns if want to obtain the best accuracy, that is IpNp=rated ampere-turns. In addition, the temperature of the primary side feeder line cannot be more than 80°C.
- 3. When the Hall current sensor is working normally, the auxiliary power supply cannot be more than $\pm 20\%$ of calibration value.
- 4. The Hall Current sensor is strictly prohibited to be fallen from high place $(\ge 1 \text{ m})$ during installation and use.
 - 5. Zero and full scale regulator potentiometer can not be adjusted.
 - 6. Auxiliary power supply is required to be deployed voluntarily.
 - 7. It is recommended to use shielded wire for the output signal wire.

5.Order Sample

Sample 1 AHBC-LT1005 Hall current sensor

Auxiliary power: DC±15V

Input: 1000A Output: 200mA Precision: 0.5级

Jiangsu Acrel Electrical Manufacturing Co., LTD.

Address: No.5 Dongmeng Road, Nanzha Street, Jiangyin City

TEL./Fax: (86) 0510-86179970

Website: www.acrel.cn ZIP code: 214405

Email: JY-ACREL001@vip.163.com

-2-